


PER-P30D

Power Supply Module with DC 5V & DC 12V Output

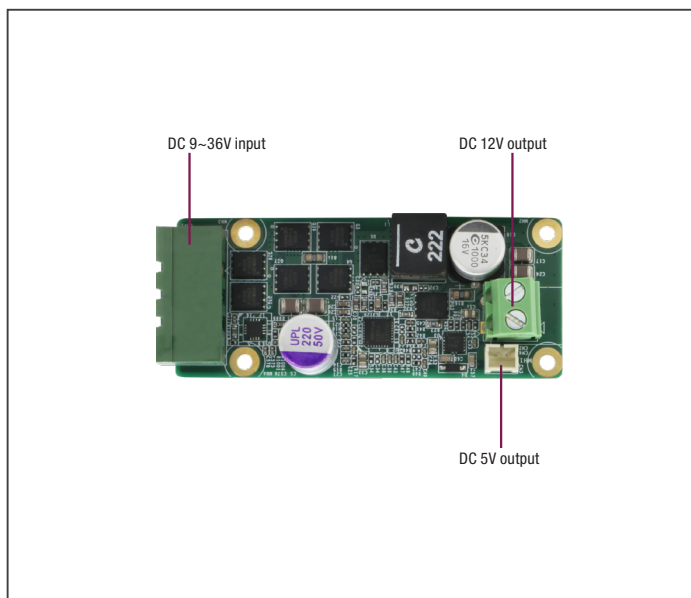

Features

- Max. 120W output
- DC 9~36V input
- Over voltage protection
- Under voltage protection
- Over current protection
- Reverse protection
- $\pm 5\%$ voltage tolerance
- Compact size for PICO boards

Specifications

System	
Power input	DC 9~36V
Power output	DC 5V + DC 12V / max.120W
Voltage tolerance	$\pm 5\%$
DIMENSION	1.18" x 2.84" (30mm x 72mm)
Gross Weight	0.07 lbs (0.03 kg)
Input CONNECTOR	2-pin Phoenix Connector.180D (Default) 3-pin Phoenix Connector.90D (colay)
Output CONNECTOR	2-pin Phoenix Connector.90D (Default)
OPERATING TEMPERATURE	32°F ~ 140°F (0°C ~ 60°C)

Packing List

- PER-P30D

Ordering Information

PART NUMBER	MODULE	Power input	Power output	TEMPERATURE
PER-P30D-A10-0001	Power Supply Module with +5V & +12V Output	DC 9~36V	DC 5V + DC 12V / max.120W	0 ~ 60°C

Optional Accessories

Part Number	Description	Qty.
170X000742	12V output power cable.15cm	1
1702150155	5V SATA power cable.15cm	1

Dimension

Unit: mm

